

UFO LED HIGH BAY LIGHT



Characteristics


- CREE SMD3030 and Lifud LED drivers for application, excellent performance with THD<15%, PF>0.95.
- IP65 waterproof with heavy duty die-cast aluminum housing, fully sealed to be dirt and bug proof, Polyester powder-coated finish, rust and corrosion proof.
- High quality polycarbonate lens with high lumen efficiency up to 150lm/w.
- Suitable for commercial lighting and industrial lighting areas.
- 120-277V/347-480VAC options.

Technique Parameter


Power	100W	162W	200W	230W
Certification	EER , IECEE , SASO2902, CE			
Lumen	15000lm	24500lm	30000lm	34500 lm
Luminous Efficiency	150lm/w			
Input Voltage	120-277V / 347-480V, 50-60Hz			
LED Brand	CREE			
Power Supply	LiFud			
CCT	4000K,5000K,7000K & Selectable CCT			
CRI	>70Ra			
Beam Angle	120°			
Ingress protection	IP65			
Operation Temperature	-4~113°F			
Lamp Dimension	Φ9.8x7.2in	Φ11.0x7.3in	Φ12.6x7.5in	Φ13.8x7.5in
Net Weight	4.8lbs	7.5lbs	9.7lbs	11.9lbs

Installation


1. Hook Suspended Mounting

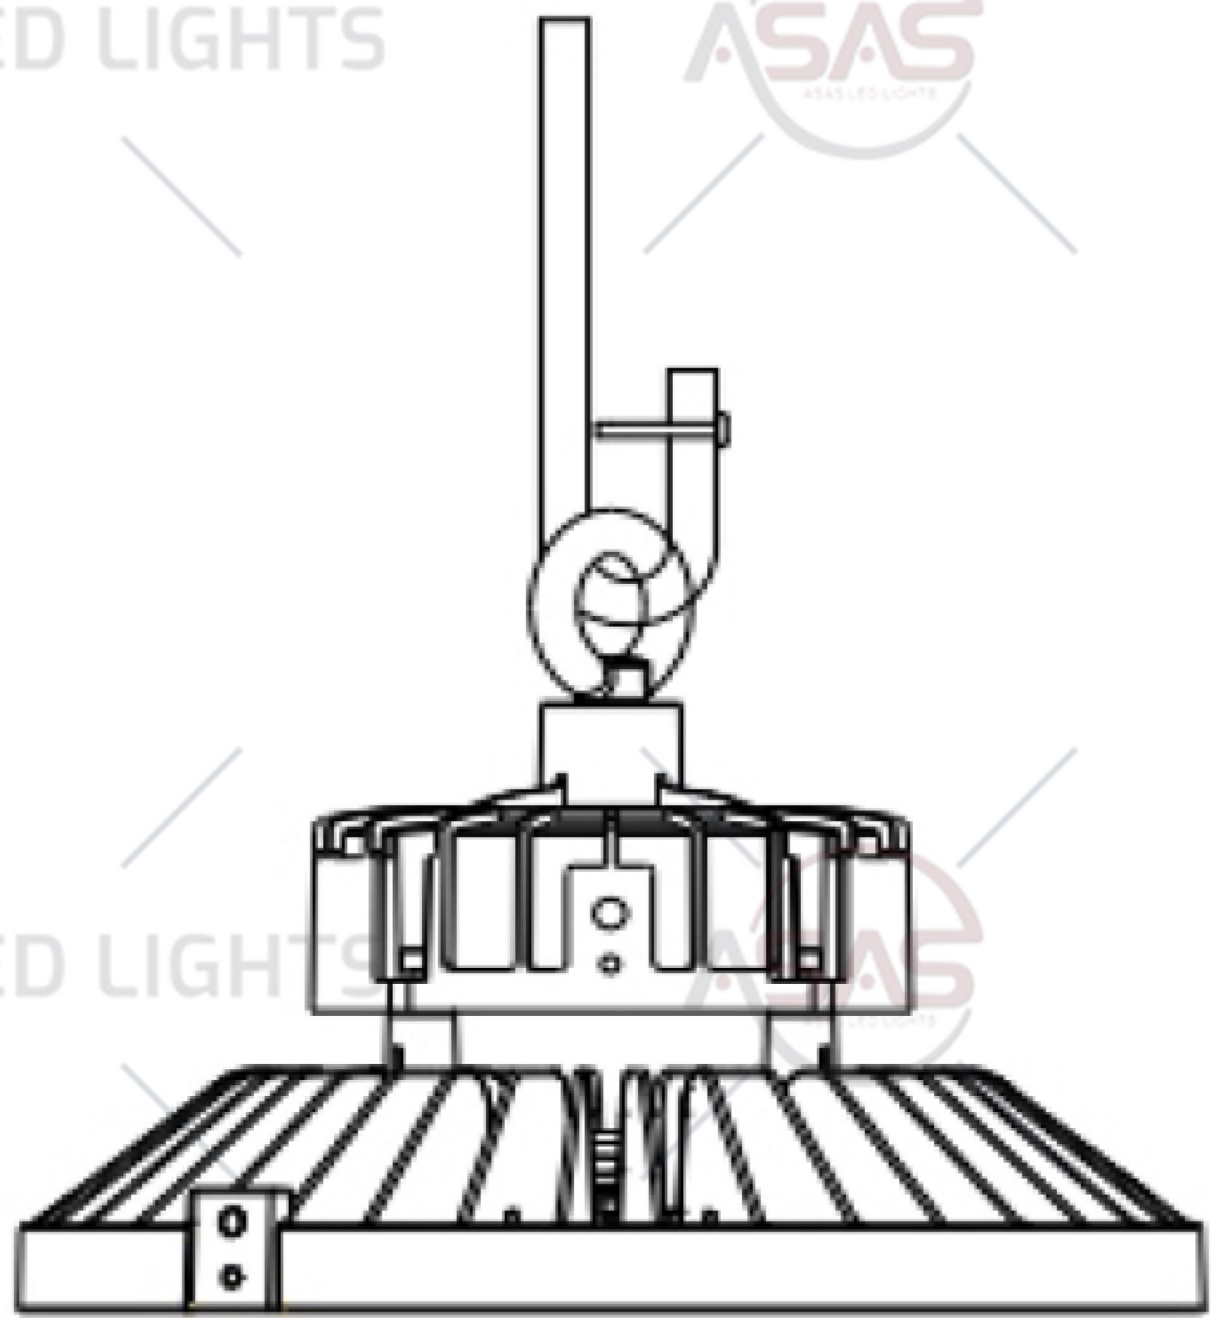

2. Surface Mounting

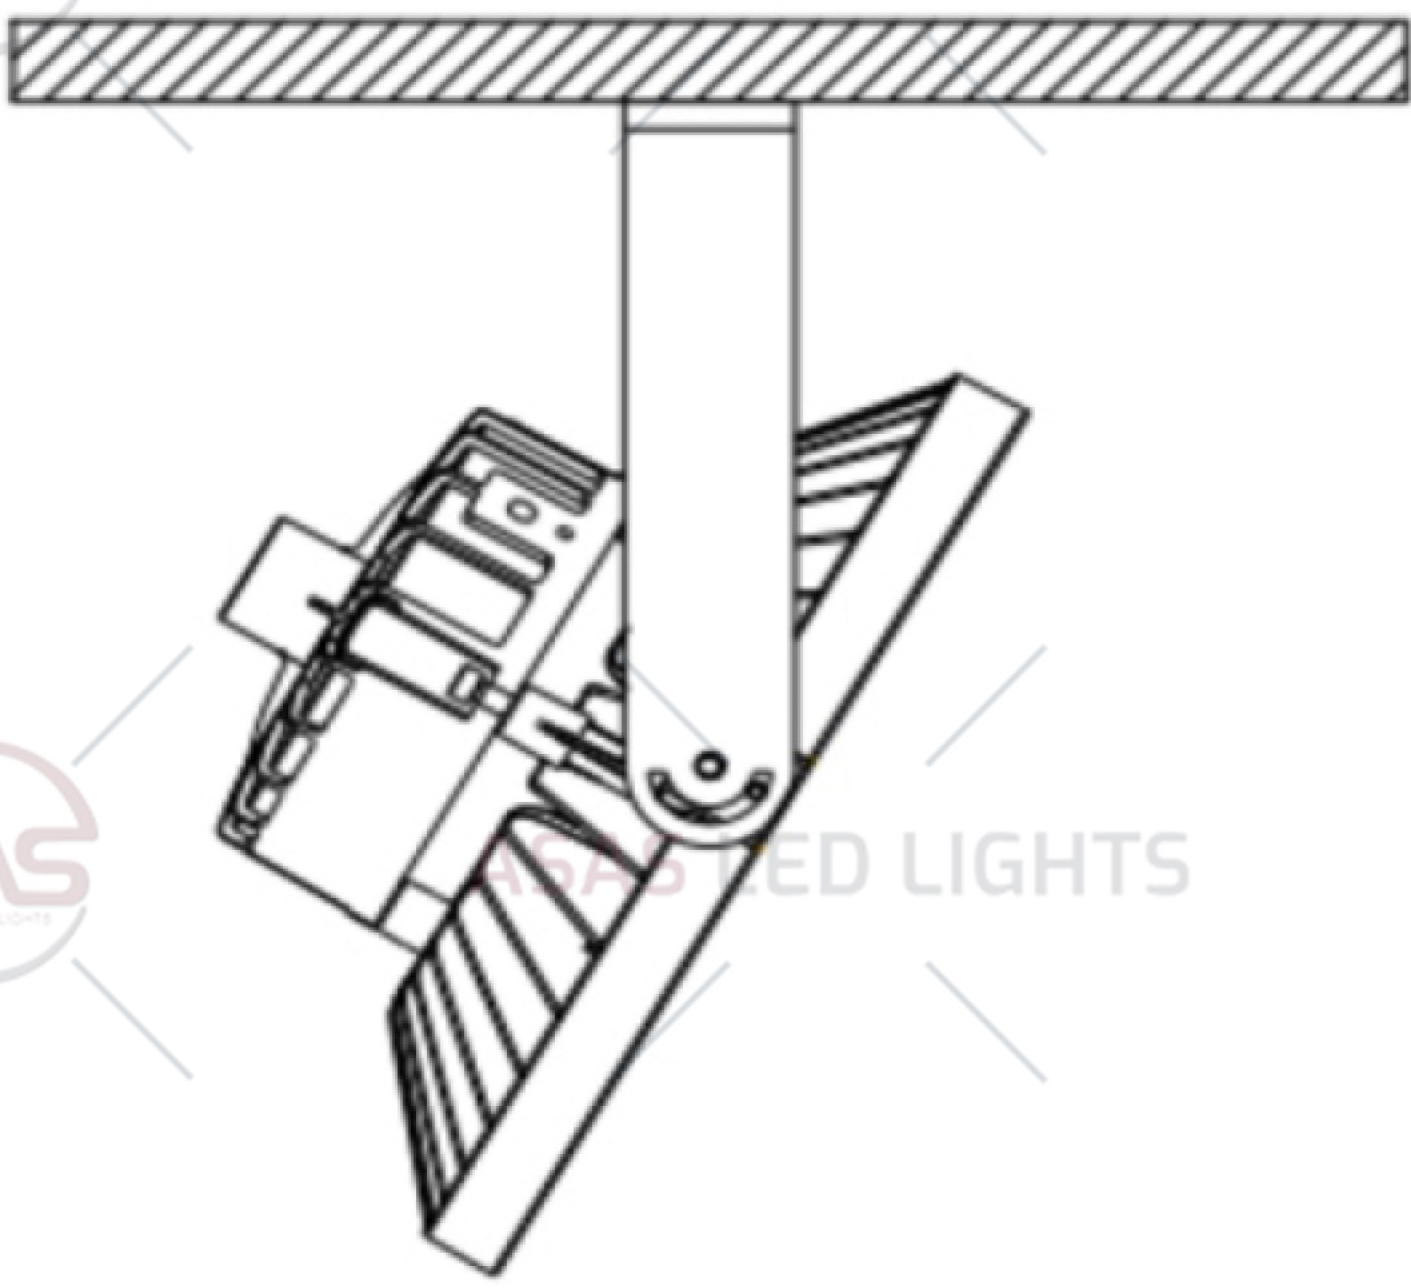


Assembly Drawing

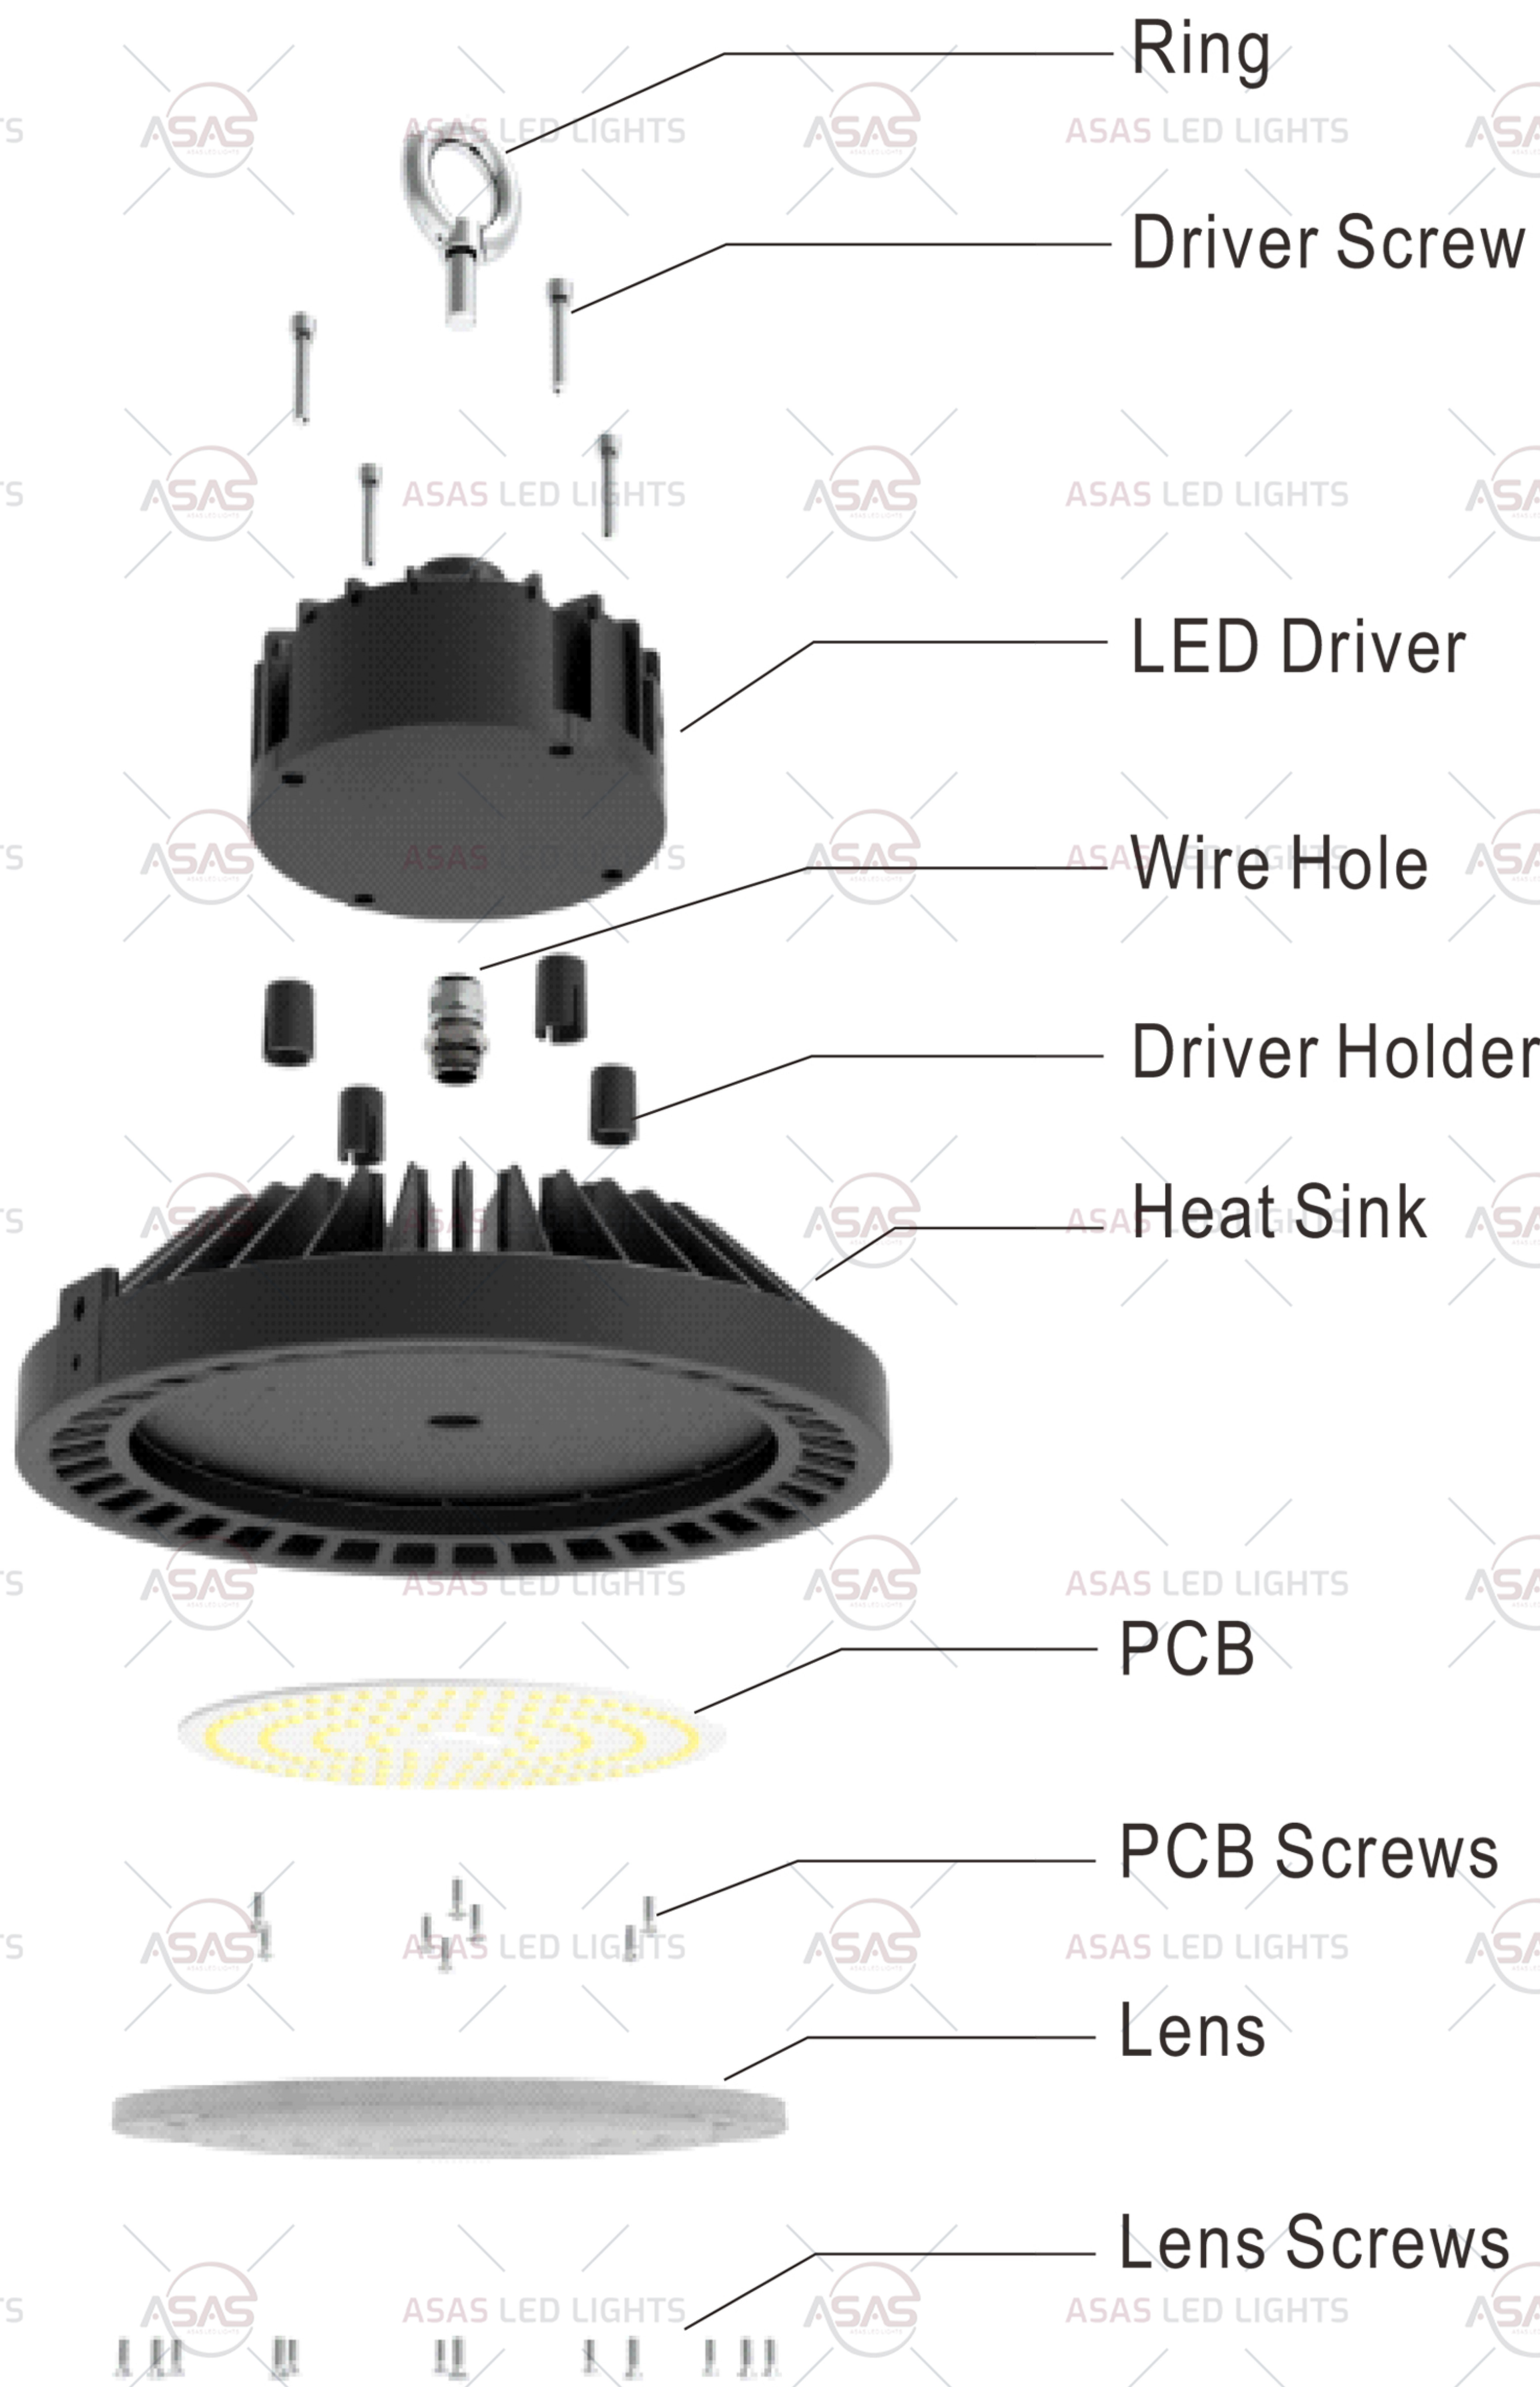


Dimensions: (mm)


100W

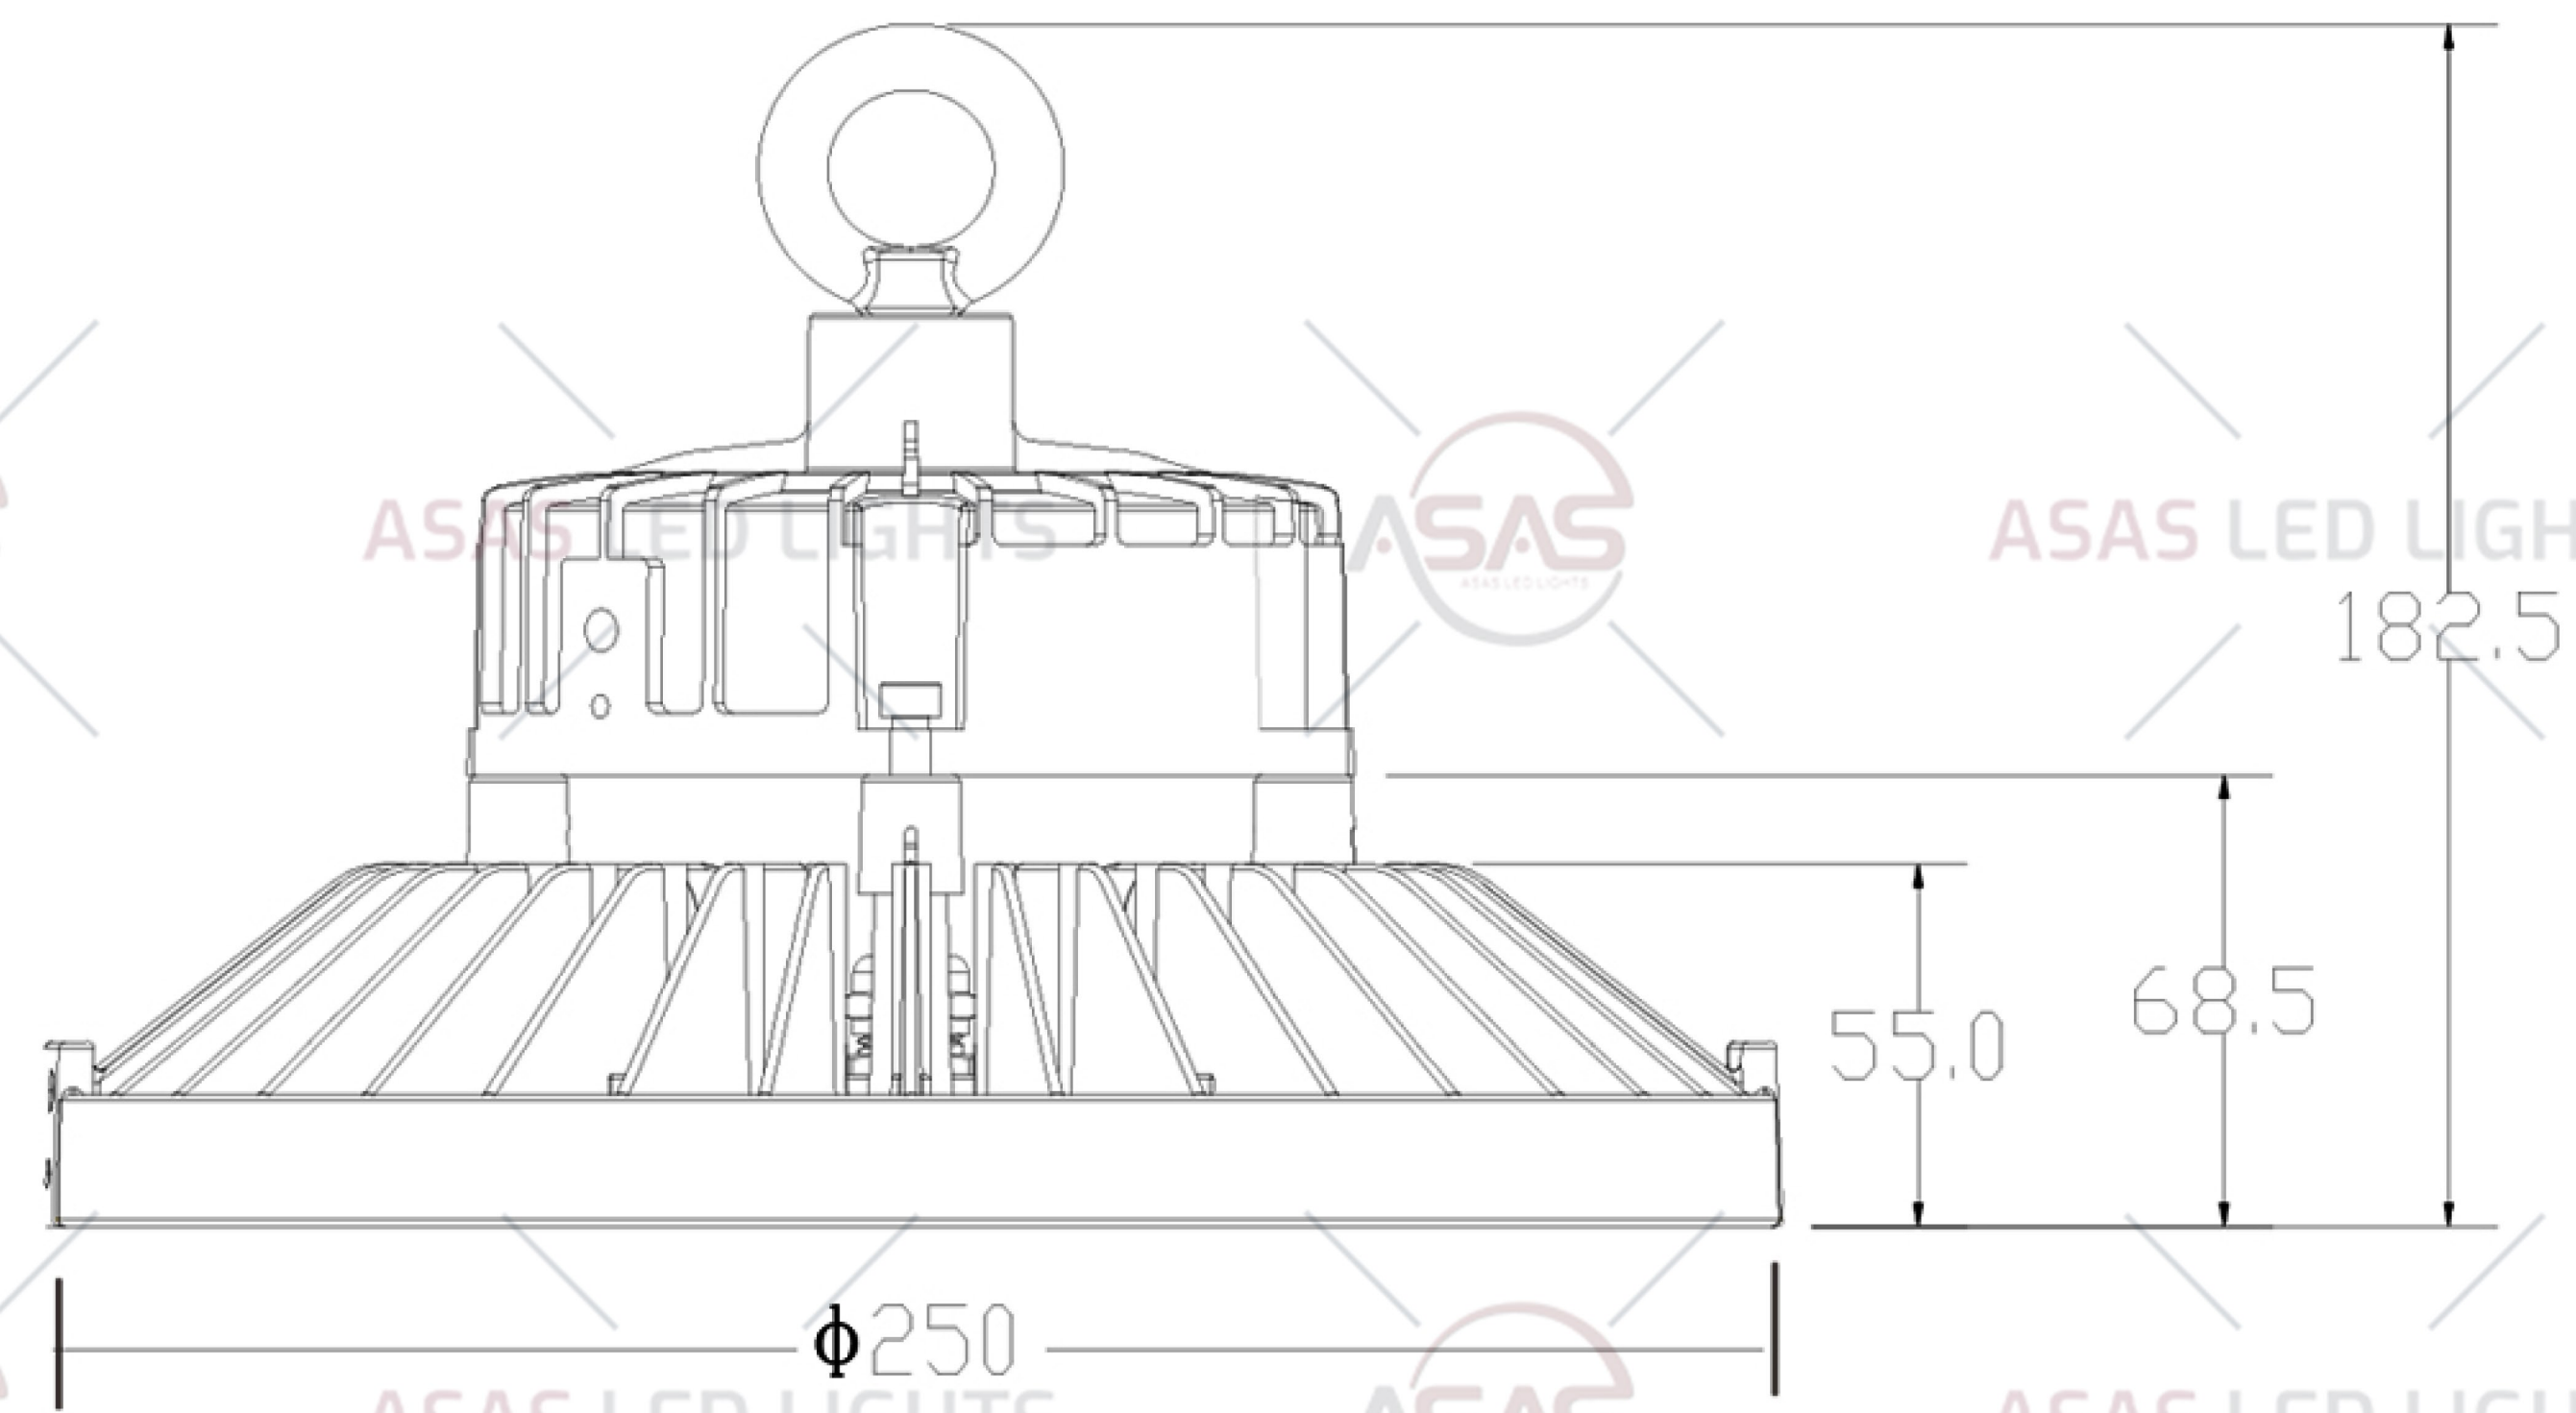


162W

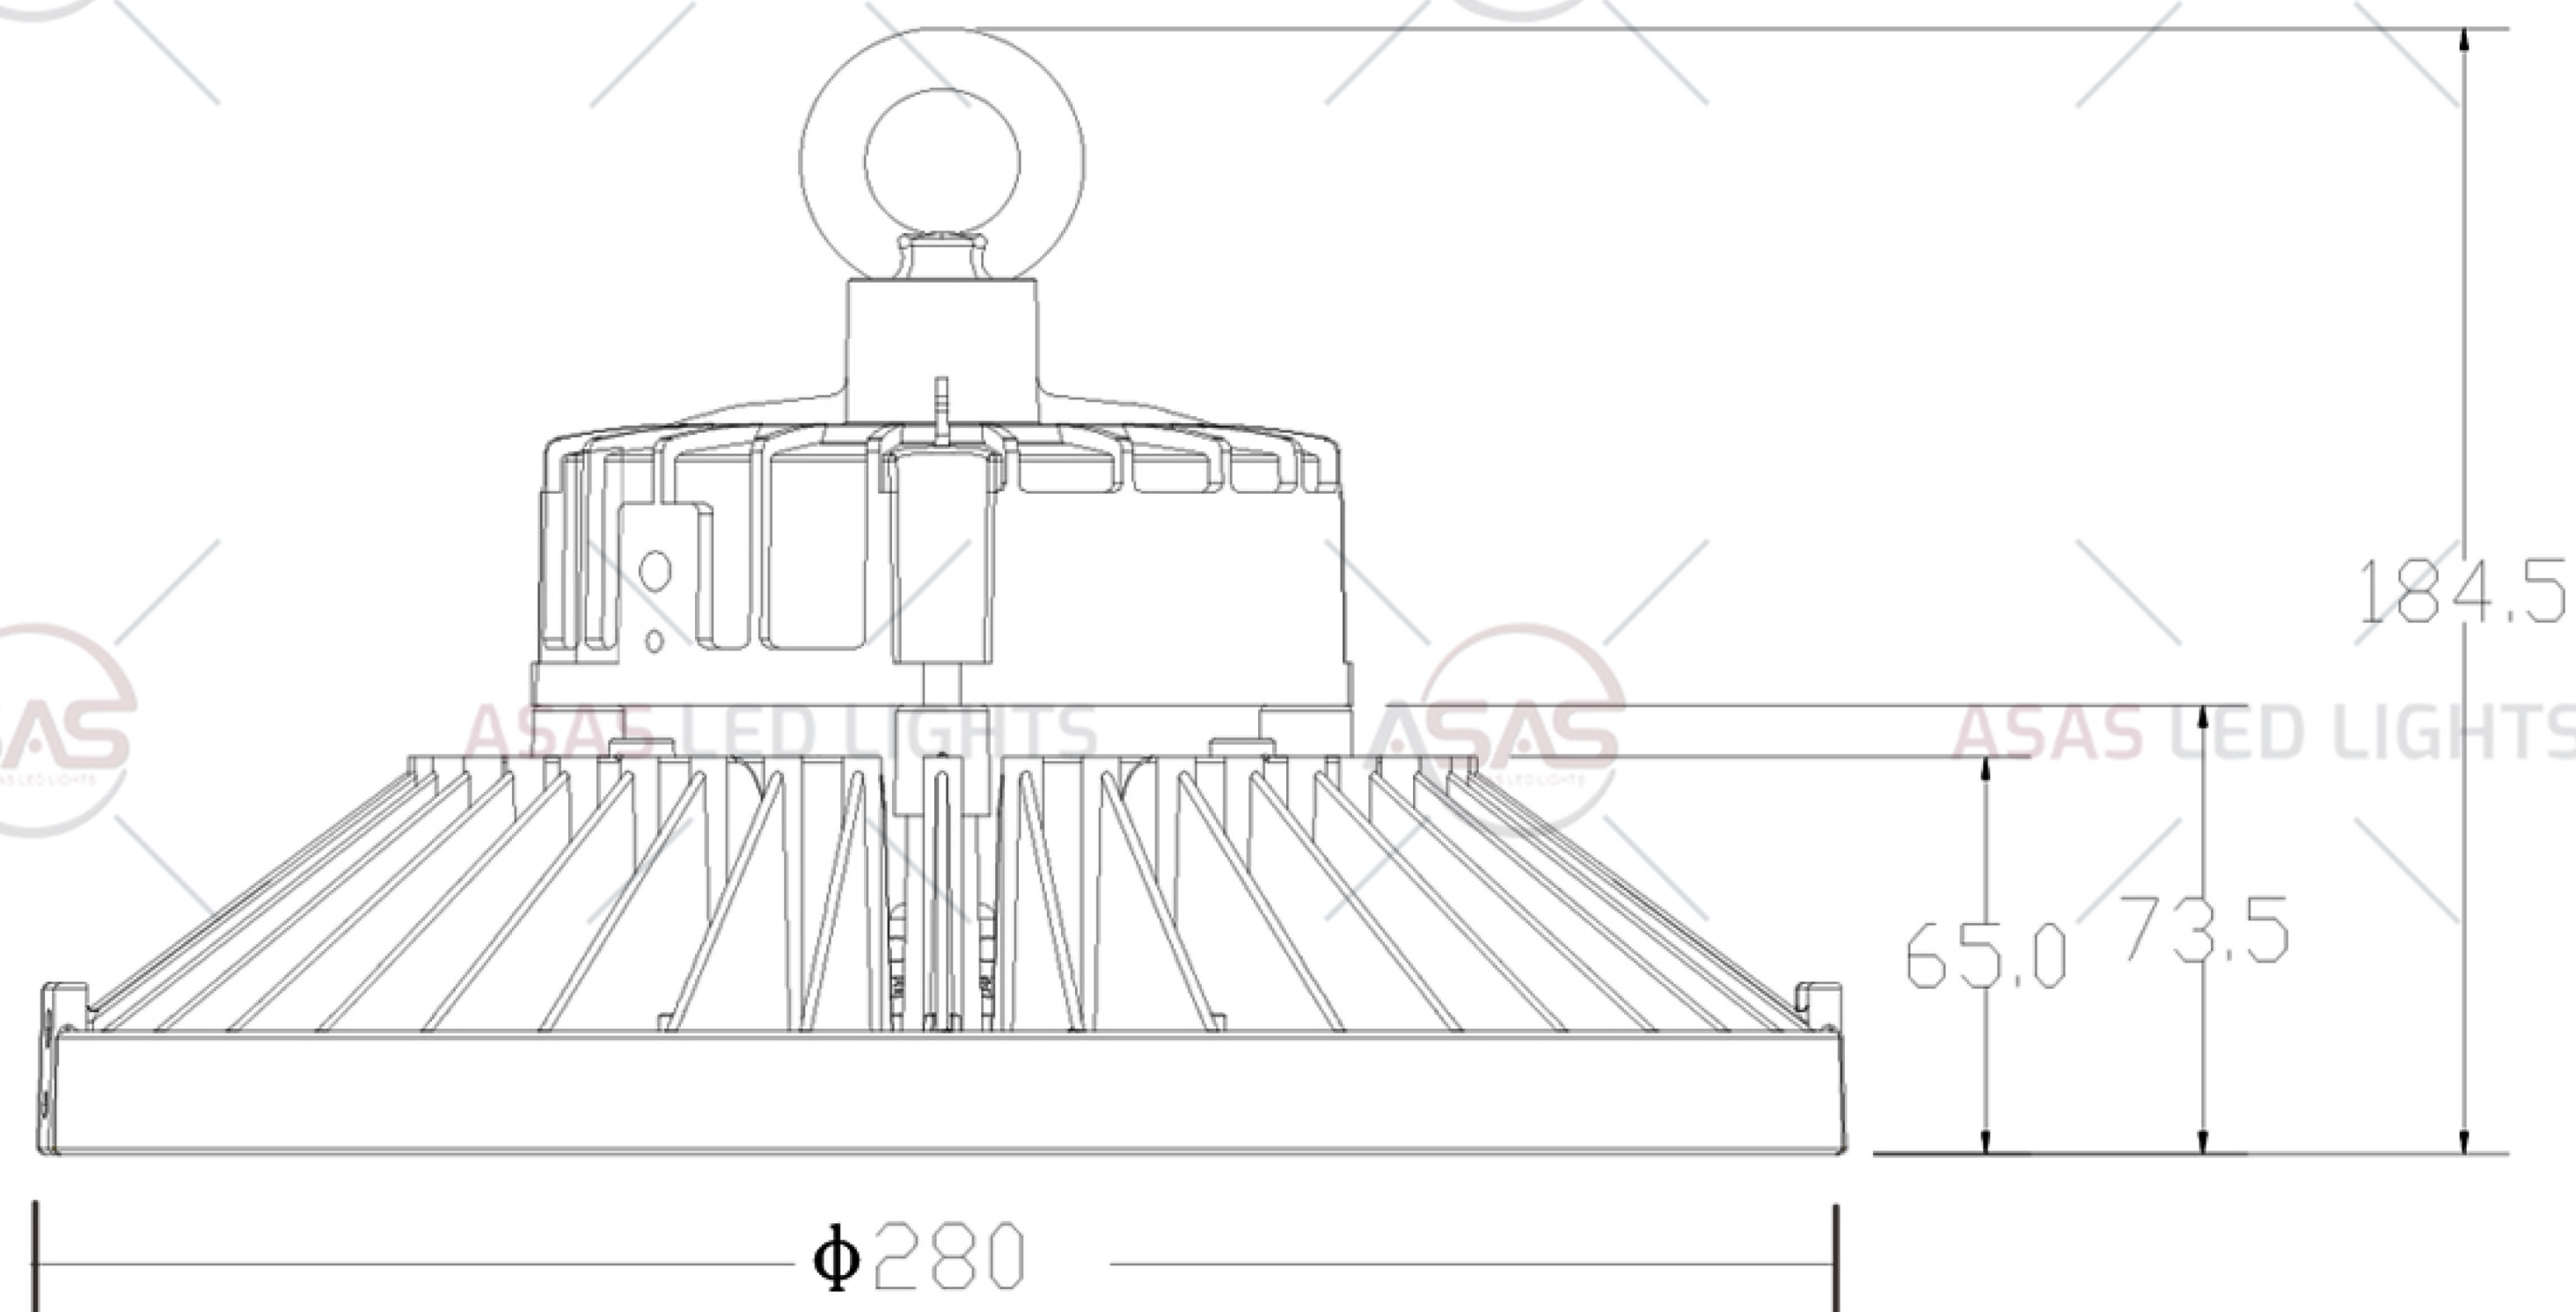

200W

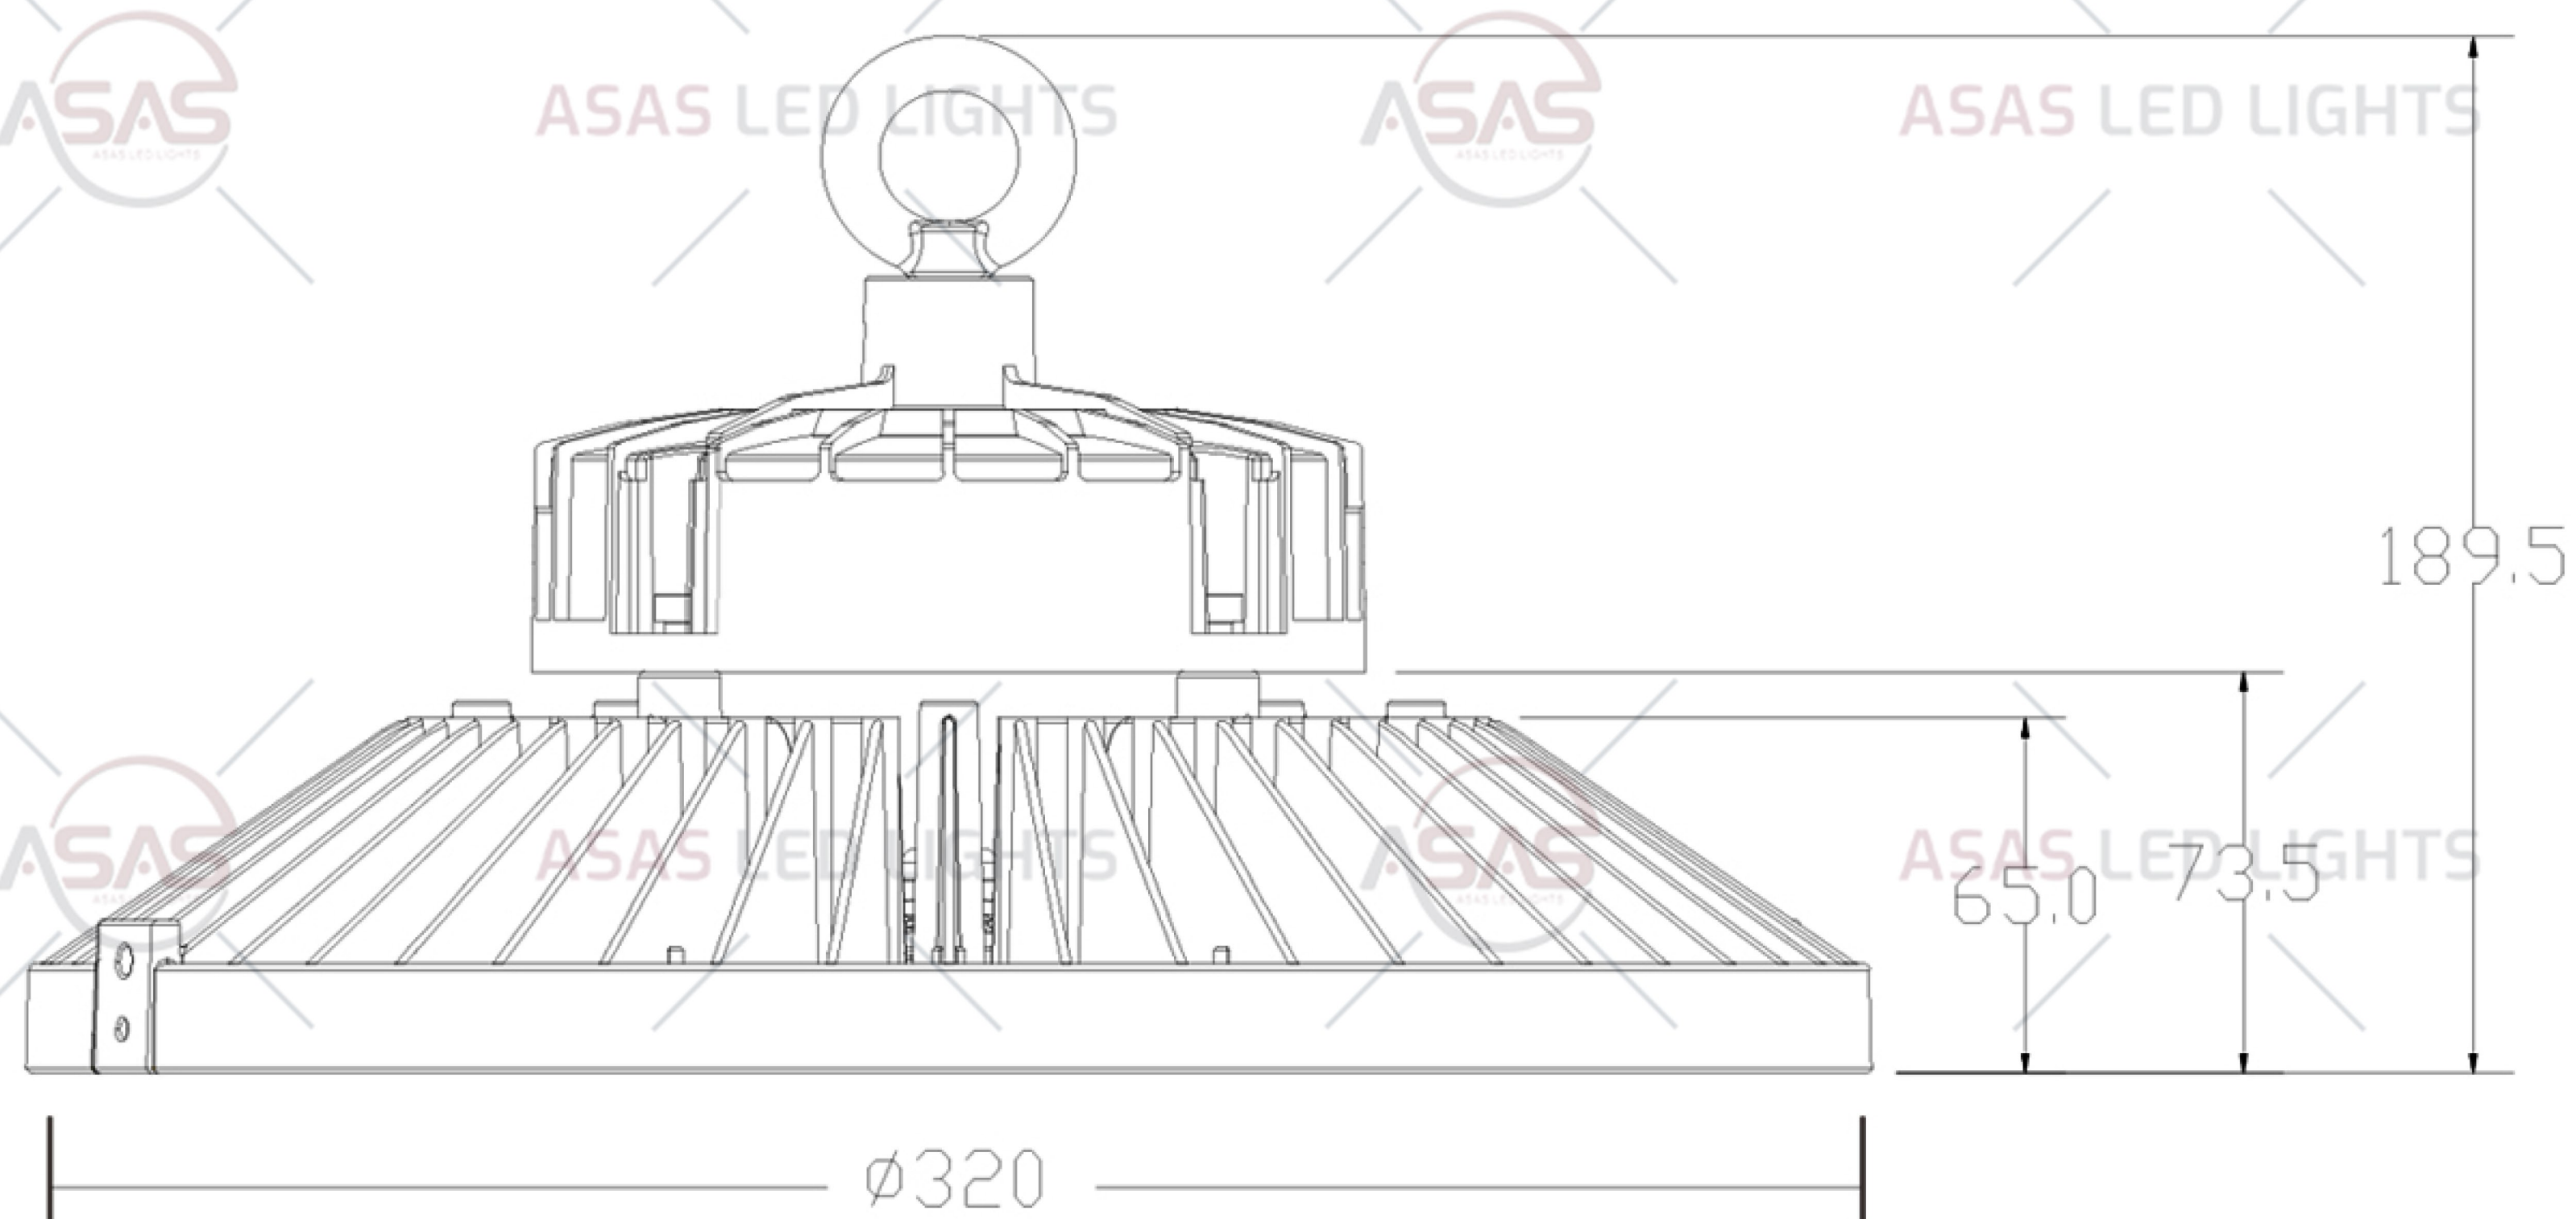

230W

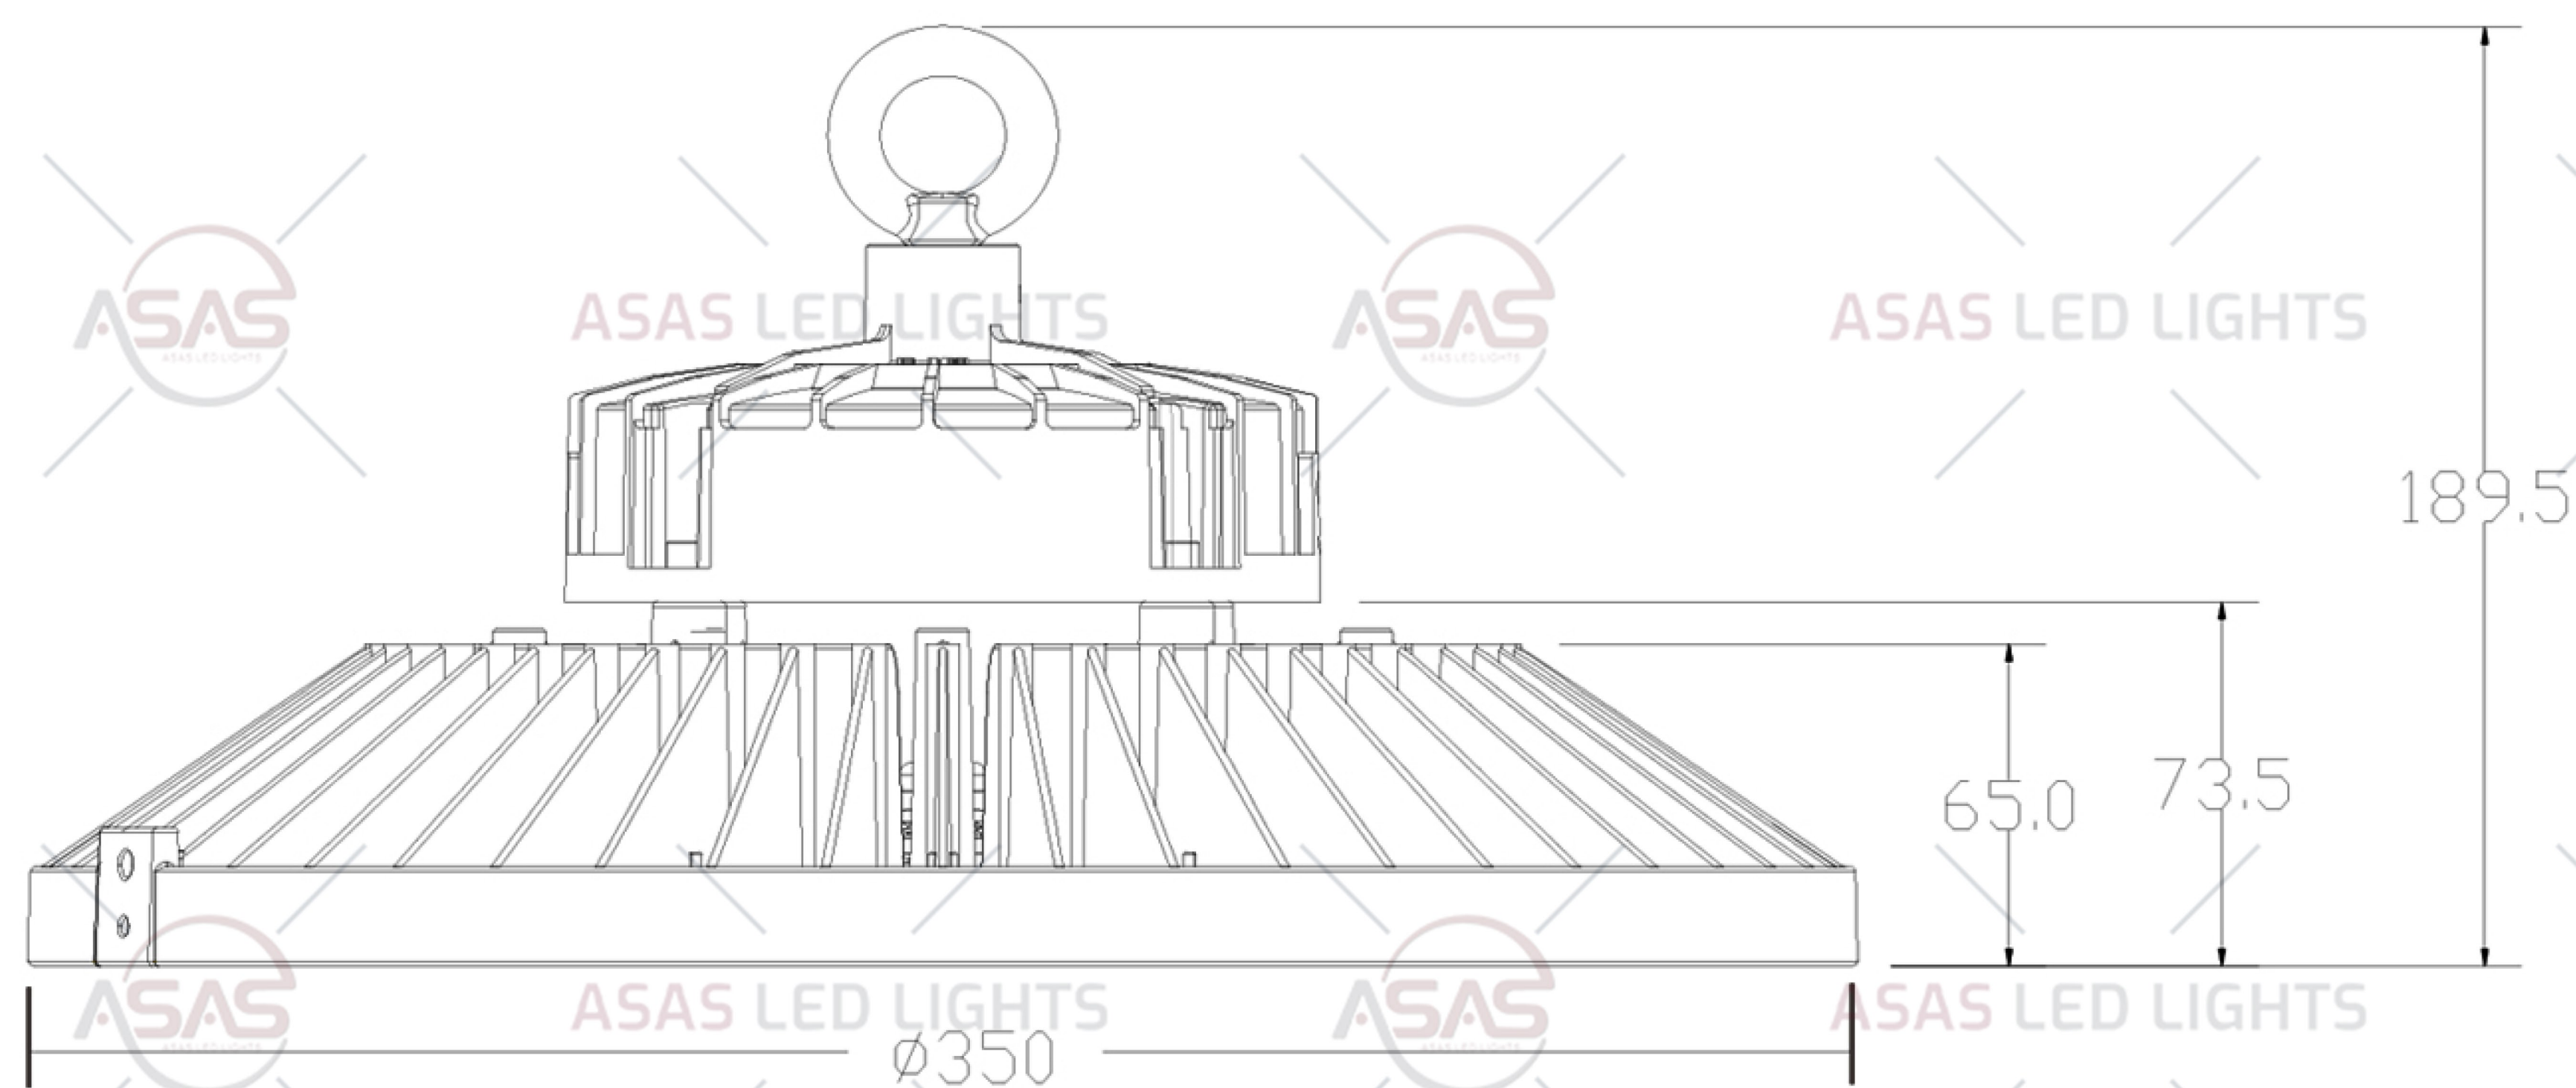

A large stack of cardboard boxes for LED lights, arranged in a palletized format. The boxes are labeled with 'LED LIGHTS' and 'SAS'. The stack is composed of multiple layers of boxes, with some boxes showing a logo and others showing technical specifications. The boxes are stacked on a green floor, and a wooden pallet is visible at the base of the stack.